



BY PRO-JECT AUDIO SYSTEMS

INSTRUCTIONS FOR USE

Pro-Ject Power Box DS Sources

Dear music lover,

Thank you for purchasing a Pro-Ject Audio Systems Power Box DS Sources.

In order to achieve maximum performance and reliability you should study these instructions for use carefully.



Warning of a hazard for the user, the unit or possible misuse




Important notice

Safety instructions

AC outlet voltages vary from country to country. Before connecting to the mains, make sure that the voltage in your area meets the voltage requirements printed on the device.



Never handle the device while your hands are wet or damp. Avoid letting liquids enter the device. Never place any item containing liquid, such as a flower vase on or near the device. Never spill any liquid on the device. Never place any naked flame sources, such as lighted candles on or near the device. The product shall not be used in damp or wet locations, next to a bathtub, sink, swimming pool or any other similar conditions.

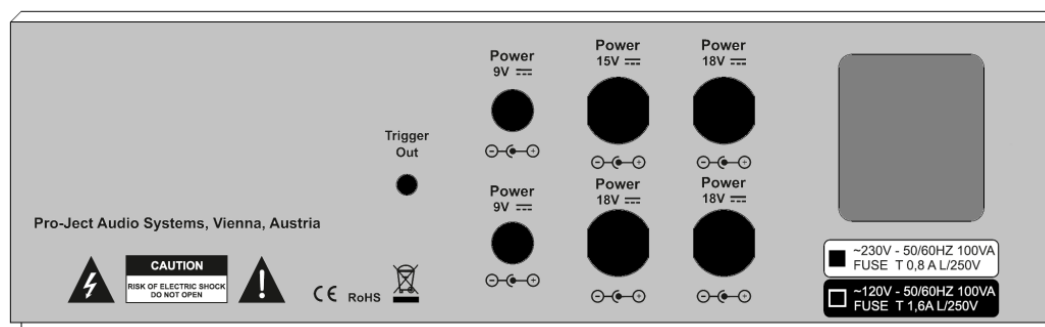

Using the product

Power Box DS Sources is designed to power a wide range of DC-powered Pro-Ject products except of power amplifiers, integrated amplifiers & receivers.



Make all connections whilst the Power Box DS Sources is **switched off or disconnected from the mains**.

Interconnection cables are included in the packaging. Original power supplies are no longer required.



In case of any doubts, consult user manuals of all connected products or ask your dealer.

9V output : CD Box S, DAC Box S FL, DAC Box S USB, Media Box S, Stream Box DS/DSnet, Bluetooth Box S.

18V output : Most of the rest of products except of power amplifiers, integrated amplifiers & receivers.

15V turntable output : All of the Pro-Ject DC-powered turntables.

Trigger connection


Power Box DS Sources is equipped with 12V trigger-out socket (jack 2.5mm) to turn on/off a Pro-Ject product with trigger input socket.



Do not use the trigger output for any other connections for which it is not designed.

Main power switch

The toggle switch turns the unit on or off. The blue LED above the switch shows that the unit is switched on.

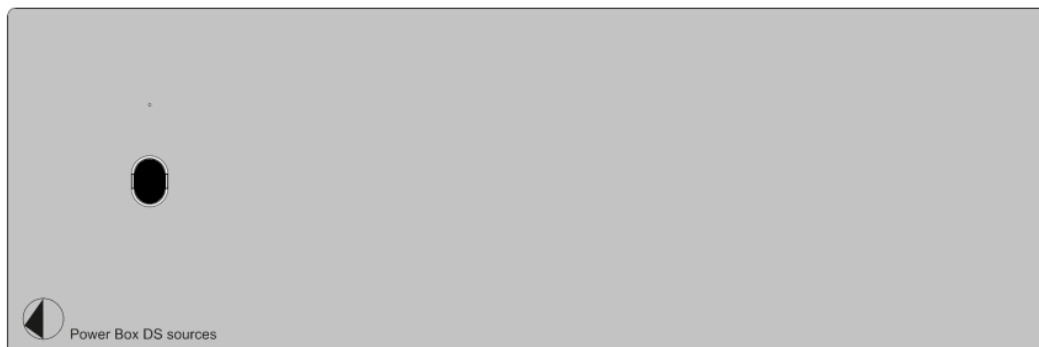

Technical specifications Pro-Ject Power Box DS Sources

Output voltage / current (socket diameter):	2x 9V/2A (1,8mm), 3x 18V/1A(2,5mm), 1x 15V(2,1mm)
Trigger output:	2,5mm jack
Dimensions W x H x D:	203 x 72 x 207 mm
Weight:	3200 g

Service

Should you encounter a problem which you are not able to alleviate or identify despite the above information, please contact your dealer for further advice. Only when the problem cannot be resolved there should the unit be sent to the responsible distributor in your country.

Warranty



The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons, release the manufacturer from any liability over and above the lawful rights of the customer.

Copyright, trademarks

Pro-Ject Audio Systems is a Registered Trademark of H. Lichtenegger.

This guide was produced by: Pro-Ject Audio Systems
Copyright © 2015. All rights reserved.

The information was correct at the time of going to press. The manufacturer reserves the right to make changes to the technical specification without prior notice as deemed necessary to uphold the ongoing process of technical development.